

Lamp Voltage: \_\_\_\_\_ V ± 5% (Standard) – \_\_\_\_\_ V

Lamp Current: \_\_\_\_\_ A (nominal)

Total Wattage: \_\_\_\_\_ KW

Max Starting Voltage: \_\_\_\_\_ V

Outside Diameter (A): \_\_\_\_\_ mm

Arc Length (between coatings) (B): \_\_\_\_\_ mm

Overall Length (C): \_\_\_\_\_ mm

If Metal Base (D): \_\_\_\_\_ (please choose from page 2)

If Ceramic Base (E): \_\_\_\_\_ (please choose from page 2)


Wire Lengths (D1): \_\_\_\_\_ mm

Wire Lengths (D2): \_\_\_\_\_ mm


- Lugs (F): \_\_\_\_\_
- \_\_\_\_\_ None- Bare wire
  - \_\_\_\_\_ Ring Lug, #8 screw
  - \_\_\_\_\_ Ring Lug, #10 screw
  - \_\_\_\_\_ Ring Lug, 1/4" screw
  - \_\_\_\_\_ Ring Lug, Metric M5 screw
  - \_\_\_\_\_ Spade Lug, #8 screw
  - \_\_\_\_\_ Spade Lug, #10 screw
  - \_\_\_\_\_ Quick Disconnect, 1/4" female
  - \_\_\_\_\_ Wire Pin

Other- specify: \_\_\_\_\_


MPUV lamps are available from 100 watts per inch to over 700 watts per inch, and arc lengths of 2-85 inches and with a wide variety of base types and terminations.

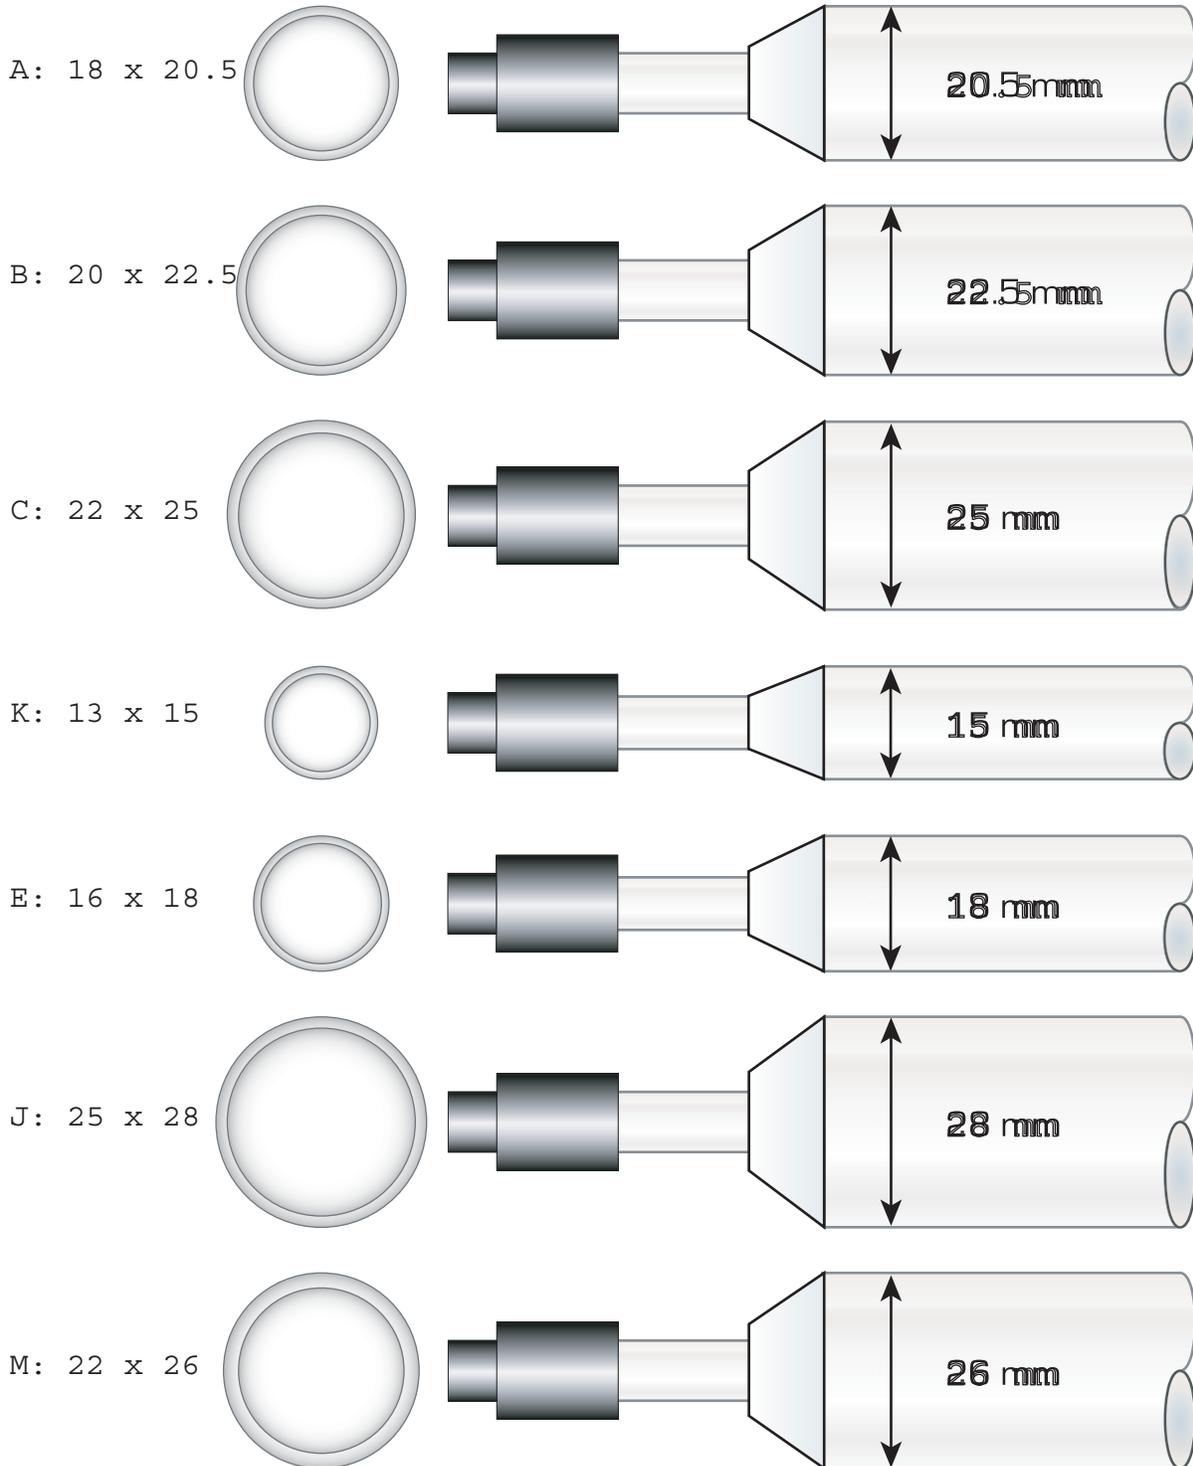


034S - Base




2S - Base

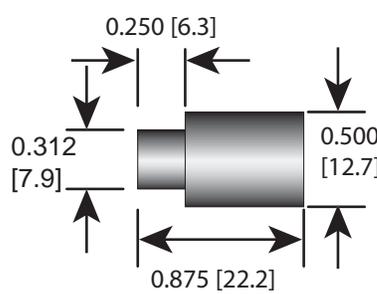


3S - Base

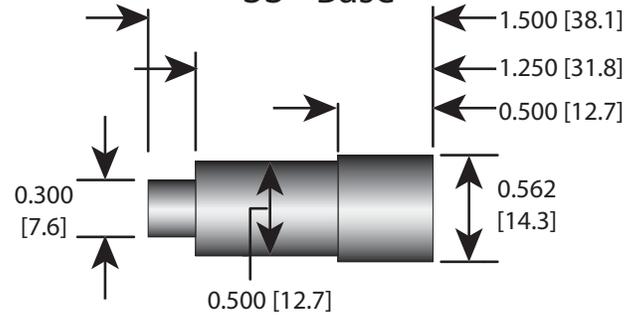


210C - Base

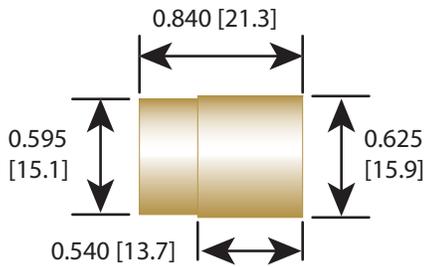


205C - Base

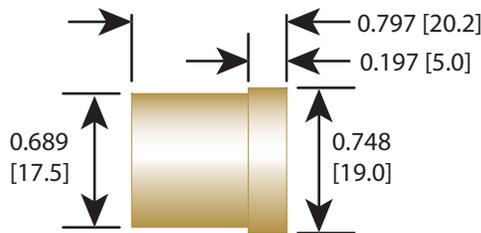


4C - Base  
(side wire slotted base also available)

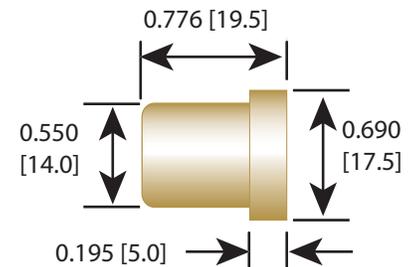

194C - Base

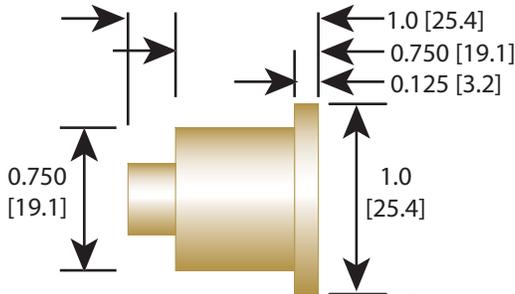


7C - Base

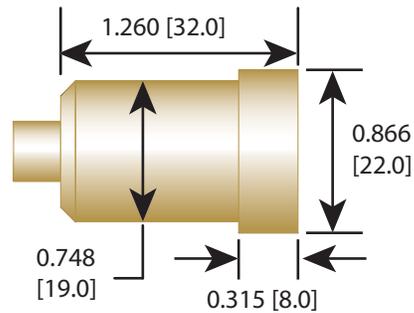


202C - Base


(side wire slotted base also available)

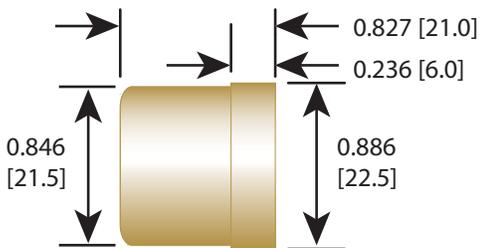


204C - Base

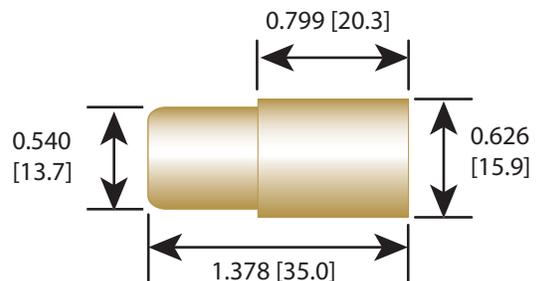

070S - Base

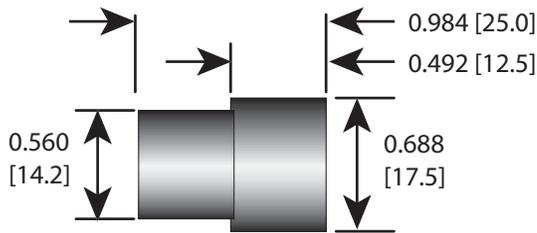


206C - Base

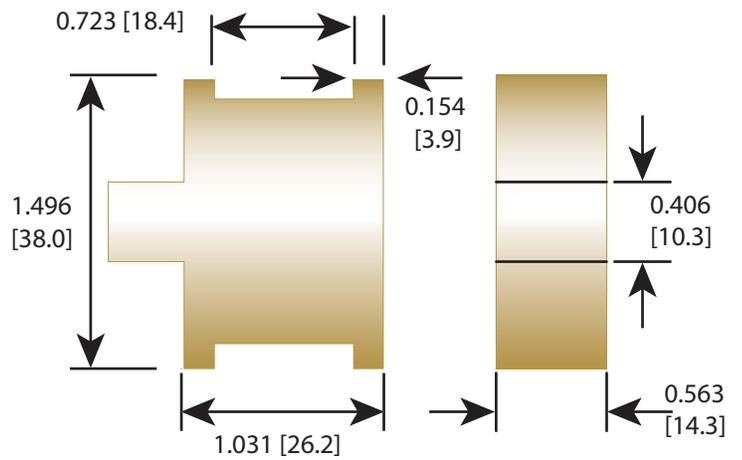


5C - Base

(side wire slotted base also available)

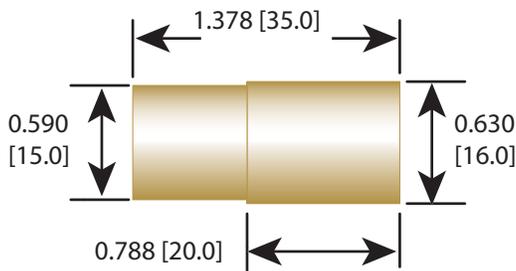


205C - Base


(side wire slotted base also available)

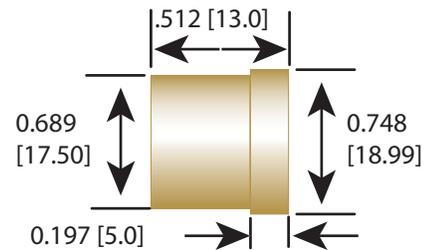


208C - Base

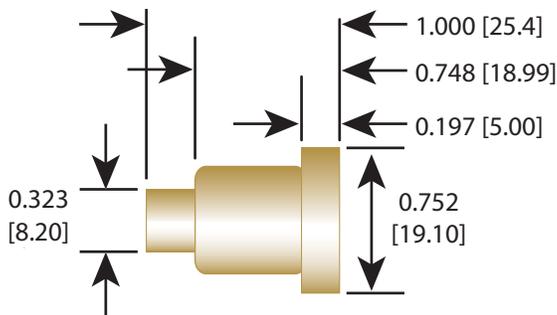

196C - Base

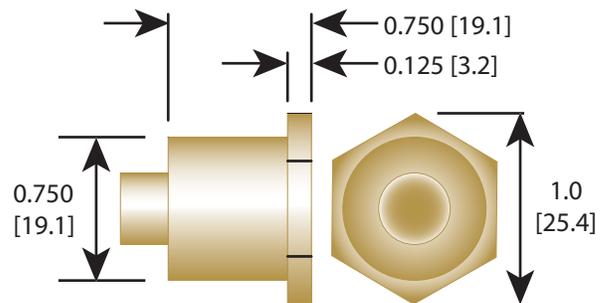

195C - Base

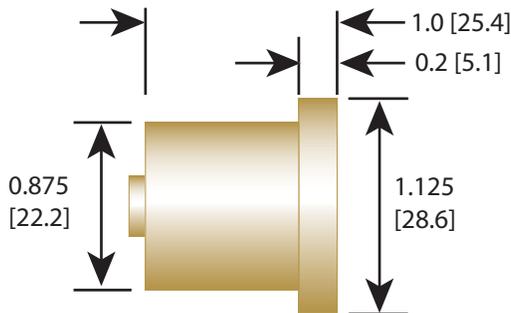

6C - Base

